

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE SOUTH BOUNDARY,

A PORTION OF THE WEST BOUNDARY,

AND

A PORTION OF THE SUBDIVISIONAL LINES

IN

**TOWNSHIP 10 NORTH, RANGE 12 WEST**

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

**Ronald K. Baugh**  
**Supervisory Cadastral Surveyor**

Under Special Instructions dated and approved **December 13, 2006**, which provided for the surveys included under Group Number **1032**, and Assignment Instructions dated **December 13, 2006**.

Survey commenced **March 22, 2007**  
Survey completed **July 19, 2007**

# INDEX DIAGRAM

Township 10 North, Range 12 West

8 6 42	43 5 42	34 4 33	28 3 28	2 22	15 1 14
7 7 40	41 8 40	32 9	27 10 26	21 11 20	13 12 13
6 18 38	39 17 38	16	15 26	19 14 19	12 13 11
6 19 37	37 20 36	31 21 31	25 22 24	18 23 18	11 24 10
5 30 35	36 29 35	30 28 29	24 27 23	17 26 16	9 25
31	34 32	33	22 34 4	15 35 3	36

## TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the south boundary, a portion of the west boundary, and a portion of the subdivisional lines in Township 10 North, Range 12 West, Salt Lake Meridian, Utah.

**History of Surveys**  
**Surveyed by** **Retr. or Resurveyed by**

**SOUTH BOUNDARY**

All	E. Wilkes & C.S. Betts	1886	
Portion			R.K. Baugh 2006

**EAST BOUNDARY**

All	E. Wilkes & C.S. Betts	1886	
All			C.P. Sylvester 1971

**WEST BOUNDARY**

All	G.V.M. Boutelle	1875	
All			H. Fitzhugh 1884

**NORTH BOUNDARY**

All	H. Fitzhugh	1883	
All			F.R. Chappell 1967

**SUBDIVISION**

All	E. Wilkes & C.S. Betts	1886	
-----	------------------------	------	--

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 1032, dated December 13, 2006.

The direction of the lines was determined by references to true meridians, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the Standards and Guidelines for Cadastral Surveys Using Global Positioning System Methods, dated May 9, 2001, Version 1.0. Trimble model 5700 GPS receivers were used for field collection. Cadastral Automated Plat Drafting (CAPD) software was the primary software utilized for the project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

## TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

Cadastral Control Network was derived from GPS static observations, post processed by the National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS): HNSLVALLY\_UT2004 CORS ARP, HILL72\_UT2004 CORS ARP, and CNRSPRNGS\_UT2004 CORS ARP.

The geographic position of the corner of sections 2, 3, 34, and 35 on the south boundary of the township as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: 41°32'30.300" N.      Longitude: 113°11'27.405" W. N.A.D. 1983,  
Network Accuracy = 0.200 meter at 95% confidence.

CHAINS

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

---

Dependent Resurvey of a Portion of the South Boundary,  
Township 10 North, Range 12 West, Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by  
E. Wilkes & C.S. Betts in 1886

---

Beginning at the 1/4 section corner of sections 2 and 35, on the south boundary of the township, monumented with a limestone, 12 X 6 X 3 inches, firmly set, marked 1/4 on north face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
S 35  
1/4 —————  
S 2  
T 9 N R 12 W  
2007

Deposit the marked stone, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

S. 89°43.3' W., between sections 2 and 35.

40.475 Point for the corner of sections 2, 3, 34, and 35, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
S 34 | S 35  
S 3 | S 2  
T 9 N R 12 W  
2007

Set a steel fence post alongside the aluminum post.

---

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

S. 89°43.3' W., between sections 3 and 34.

40.475 Point for the 1/4 section corner of sections 3 and 34, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

	T 10 N R 12 W
	S 34
1/4	_____
	S 3
	T 9 N R 12 W
	2007

Set a steel fence post alongside the aluminum post.

80.950 The corner of sections 3, 4, 33, and 34, monumented with an unrecorded iron pipe, 2 inches diameter, with 2 1/2 inches diameter iron cap marked, 3 4 33 34.

A wood post, 18 inches long, lies alongside, the iron pipe.

The iron pipe is accepted as the best available evidence of the position of the original corner.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

	T 10 N R 12 W
	S 33   S 34
	S 4   S 3
	T 9 N R 12 W
	2007

Deposit the wood post inside the aluminum post and iron pipe, inverted, alongside.

Set a steel fence post alongside the aluminum post.

---

Dependent Resurvey of a Portion of the West Boundary,  
Township 10 North, Range 12 West, Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by G.V.M. Boutelle  
in 1875, and the Resurvey Executed by H. Fitzhugh in 1884

---

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 25, 30, 31, and 36, on the west boundary of the township, monumented with a wood post, 14 X 2 X 2 inches, projecting 6 inches above the ground; and a steel fence post alongside.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N	
R 13 W R 12 W	
S 25	S 30
S 36	S 31

2007

Deposit the wood post alongside the aluminum post.

N. 0°46.7' W., between sections 25 and 30.

39.721

Point for the 1/4 section corner of sections 25 and 30, at proportionate distance, from this point, found a limestone out of position and lying on the ground approximately 15 links distance, broken in two, 15 X 10 X 6 inches when put together, no visible marks. A steel fence post bears N. 68° E., 270 links distance.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N	
R 13 W R 12 W	
1/4	
S 25	S 30
2007	

Deposit the broken stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

79.442

Point for the corner of sections 19, 24, 25, and 30, at proportionate distance, there is no remaining evidence of the original corner. A steel fence post bears N. 72° E., 298 links distance.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T 10 N	
R 13 W	R 12 W
S 24	S 19
S 25	S 30

2007

Set a steel fence post alongside the aluminum post.

---

N. 0°46.7' W., between sections 19 and 24.

39.721 Point for the 1/4 section corner of sections 19 and 24, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N	
R 13 W	R 12 W
1/4	
S 24	S 19

2007

Set a steel fence post alongside the aluminum post.

79.442 Point for the corner of sections 13, 18, 19, and 24, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N	
R 13 W	R 12 W
S 13	S 18
S 24	S 19

2007

Set a steel fence post alongside the aluminum post.

---

N. 0°46.7' W., between sections 13 and 18.



DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 39.721 Point for the 1/4 section corner of sections 13 and 18, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N	
R 13 W R 12 W	
1/4	
S 13	S 18
2007	

Set a steel fence post alongside the aluminum post.

- 79.442 The corner of sections 7, 12, 13, and 18, monumented with an unrecorded iron pipe, 1 inch diameter, without iron cap attached; and a steel fence post alongside.

The iron pipe is accepted as the best available evidence of the position of the original corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N	
R 13 W R 12 W	
S 12	S 7
S 13	S 18

2007

Deposit the iron pipe, inverted, alongside the aluminum post.

N. 0°19.4' W., between sections 7 and 12.

- 39.945 Point for the 1/4 section corner of sections 7 and 12, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T 10 N  
R 13 W R 12 W  
1/4  
S 12 | S 7  
2007

Set a steel fence post alongside the aluminum post.

**79.890** The corner of sections 1, 6, 7, and 12, monumented with an unrecorded iron pipe, 1 inch diameter, with a 1 1/2 inches diameter iron cap marked, 1 6 7 12, and steel fence post alongside.

The iron pipe is accepted as the best available evidence of the position of the original corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N  
R 13 W R 12 W  
S 1 | S 6  
S 12 | S 7  
2007

Deposit the iron pipe, inverted, alongside the aluminum post.

**N. 1°23.9' E.,** between sections 1 and 6.

**40.825** The 1/4 section corner of sections 1 and 6, monumented with a basalt stone, 16 X 8 X 3 inches, firmly set, projecting 8 inches above the ground, marked 1/4 on west face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N  
R 13 W R 12 W  
1/4  
S 1 | S 6  
2007

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

Deposit the marked stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

N. 1°55.0' W., beginning new measurement.

39.266

The corner of Townships 10 and 11 North, Ranges 12 and 13 West, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1967 resurvey. Alongside the corner, an unrecorded iron pipe, 1 inch diameter, projecting 3 ft. above the ground, with 1 1/2 inches diameter iron cap marked, 1 6 31 36, and a steel fence post.

---

Dependent Resurvey of a Portion of the Subdivisional Lines,  
Township 10 North, Range 12 West, Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by  
E. Wilkes & C.S. Betts in 1886

---

From the corner of sections 25, 26, 35, and 36, monumented with a limestone, 15 X 8 X 6 inches, firmly set, marked with 1 notch on south and 1 notch on east edges.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 26	S 25
S 35	S 36

2007

Set a steel fence post alongside the aluminum post.

N. 0°11.9' W., between sections 25 and 26.

41.094

Point for the 1/4 section corner of sections 25 and 26, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T 10 N R 12 W

1/4

S 26 | S 25

2007

Set a steel fence post alongside the aluminum post.

82.188

The corner of sections 23, 24, 25, and 26, monumented with a limestone, 12 X 11 X 5 inches, firmly set, marked with 2 notches on south and 1 notch on east edges. Alongside the corner, an unrecorded iron pipe, 1 1/2 inches diameter, with 2 inches diameter iron cap marked, 23 24 25 26.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 23 | S 24  
S 26 | S 25

2007

Deposit the marked stone and iron pipe, inverted, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

From the corner of sections 19, 24, 25, and 30, on the east boundary of the township, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 4 inches above the ground, with brass cap marked as described in the official record of the 1971 resurvey; and a steel fence post alongside.

S. 89°25.4' W., between sections 24 and 25.

38.769

Point for the 1/4 section corner of sections 24 and 25, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T 10 N R 12 W  
S 24  
1/4 —————  
S 25  
2007

Set a steel fence post alongside the aluminum post.

77.538 The corner of sections 23, 24, 25, and 26.

---

N. 1°53.8' W., between sections 23 and 24.

39.657 Point for the 1/4 section corner of sections 23 and 24, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
1/4  
S 23 | S 24  
2007

Set a steel fence post alongside the aluminum post.

79.314 Point for the corner of sections 13, 14, 23, and 24, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
S 14 | S 13  
S 23 | S 24  
2007

Set a steel fence post alongside the aluminum post.

---

From the corner of sections 13, 18, 19, and 24, on the east boundary of the township, monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone, 3 ft. base, to top of brass cap marked as described in the official record of the 1971 resurvey.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

Set a steel fence post alongside the iron post.

S. 89°36.0' W., between sections 13 and 24.

- 39.891 Point for the 1/4 section corner of sections 13 and 24, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
S 13  
1/4 —————  
S 24  
2007

Set a steel fence post alongside the aluminum post.

- 79.782 The corner of sections 13, 14, 23, and 24.
- 

N. 2°07.4' W., between sections 13 and 14.

- 39.662 Point for the 1/4 section corner of sections 13 and 14, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
1/4  
S 14 | S 13  
2007

Set a steel fence post alongside the aluminum post.

- 79.324 Point for the corner of sections 11, 12, 13, and 14, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T 10 N R 12 W

S 11	S 12
S 14	S 13

2007

Set a steel fence post alongside the aluminum post.

---

From the corner of sections 7, 12, 13, and 18, on the east boundary of the township, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 4 inches above the ground, with brass cap marked as described in the official record of the 1971 resurvey; and a steel fence post alongside.

N. 89°33.4' W., between sections 12 and 13.

38.739 Point for the 1/4 section corner of sections 12 and 13, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

	T 10 N R 12 W
	S 12
1/4	_____
	S 13
	2007

Set a steel fence post alongside the aluminum post.

Raise a mound of stone, 3 ft. base, 6 inches high, west of aluminum post.

77.478 The corner of sections 11, 12, 13, and 14.

---

N. 1°14.9' E., between sections 11 and 12.

39.644 The 1/4 section corner of sections 11 and 12, monumented with a limestone, 12 X 10 X 5 inches, firmly set, plainly marked 1/4 on west face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T 10 N R 12 W  
1/4

S 11	S 12
------	------

2007

Deposit the marked stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

N. 2°14.8' W., beginning new measurement.

39.834

The corner of sections 1, 2, 11, and 12, monumented with a limestone, 11 X 9 X 5 inches, marked with 5 grooves on south face and 1 notch on east edge.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 2	S 1
S 11	S 12

2007

Deposit the marked stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

From the corner of sections 1, 6, 7, and 12, on the east boundary of the township, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 4 inches above the ground, with brass cap marked as described in the official record of the 1971 resurvey; and a steel fence post alongside.

N. 89°52.2' W., between sections 1 and 12.

38.751

Point for the 1/4 section corner of sections 1 and 12, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:



DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T 10 N R 12 W  
S 1  
1/4 —————  
S 12  
2007

Set a steel fence post alongside the aluminum post.

77.502 The corner of sections 1, 2, 11, and 12.

---

N. 1°07.3' W., between sections 1 and 2.

40.563 Point for the 1/4 section corner of sections 1 and 2, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
1/4  
S 2 | S 1  
2007

Set a steel fence post and a wood stake alongside the aluminum post.

79.200 The corner of sections 1, 2, 35, and 36, on the north boundary of the township, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 8 inches above the ground, with brass cap marked as described in the official record of the 1967 resurvey. Alongside the corner, an unrecorded iron pipe, 2 inches diameter, firmly set, projecting 1 inch above the ground, with iron cap marked, 1 2 35 36, and a steel fence post.

---

From the corner of sections 2, 3, 34, and 35, on the south boundary of the township, hereinbefore described.

N. 0°14.8' W., between sections 34 and 35.

40.325 Point for the 1/4 section corner of sections 34 and 35, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T 10 N R 12 W

1/4

S 34 | S 35

2007

Set a steel fence post alongside the aluminum post.

80.650

The corner of sections 26, 27, 34, and 35, monumented with a limestone, 15 X 10 X 6 inches, firmly set, marked with 1 groove on south and 2 grooves on east faces. Alongside the corner, an unrecorded iron pipe, 1 1/2 inches diameter, with 2 inches diameter iron cap marked, 26 27 34 35.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 27	S 26
S 34	S 35

2007

Deposit the marked stone and iron pipe, inverted, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

From the corner of sections 25, 26, 35, and 36.

S. 89°05.4' W., between sections 26 and 35.

40.732

The 1/4 section corner of sections 26 and 35, monumented with a wood post, firmly set, projecting 12 inches above the ground, with no visible marks.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 26

1/4 —————

S 35

2007

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit the wood post inside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

S.  $88^{\circ}35.2'$  W., beginning new measurement.

38.572 The corner of sections 26, 27, 34, and 35.

---

N.  $0^{\circ}38.5'$  W., between sections 26 and 27.

39.991 The  $1/4$  section corner of sections 26 and 27, monumented with a limestone, 9 X 9 X 6 inches, firmly set, marked  $1/4$  on west face.

At the corner point

Set an aluminum post, 30 inches long, 2  $1/2$  inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
1/4  
S 27 | S 26  
2007

Deposit the marked stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

N.  $0^{\circ}31.3'$  W., beginning new measurement.

39.956 The corner of sections 22, 23, 26, and 27, monumented with a conglomerate stone, broken in two, 15 X 13 X 2 inches, when put together, the bottom half is firmly set, the top half is marked with 2 grooves on south face and 2 notches on east edge. Alongside the corner, an unrecorded iron pipe, 1  $1/2$  inches diameter, with 2 inches diameter iron cap marked, 22 23 26 27.

At the corner point

Set an aluminum post, 30 inches long, 2  $1/2$  inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T 10 N R 12 W

S 22	S 23
S 27	S 26

2007

Deposit the broken marked stone and iron pipe, inverted,  
alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

From the corner of sections 23, 24, 25, and 26.

S. 87°14.6' W., between sections 23 and 26.

39.944 Point for the 1/4 section corner of sections 23 and 26, at  
proportionate distance, there is no remaining evidence of the  
original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,  
26 inches in the ground, with magnet at base, and aluminum cap  
marked:

	T 10 N R 12 W
	S 23
1/4	_____
	S 26
	2007

Set a steel fence post alongside the aluminum post.

79.888 The corner of sections 22, 23, 26, and 27.

---

N. 1°53.3' W., between sections 22 and 23.

40.174 Point for the 1/4 section corner of sections 22 and 23, at  
proportionate distance, there is no remaining evidence of the  
original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,  
26 inches in the ground, with magnet at base, and aluminum cap  
marked:

	T 10 N R 12 W
	1/4
S 22	S 23
	_____
	2007

Set a steel fence post alongside the aluminum post

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- 80.348 The corner of sections 14, 15, 22, and 23, monumented with a conglomerate stone, 12 X 10 X 2 inches, firmly set, marked with 3 notches on south and 2 notches on east edges. Alongside the corner, a 2 inch carsonite survey marker, and an unrecorded iron pipe, 1 1/2 inches diameter, 17 inches long, projecting 7 inches above the ground, with a 2 inches diameter iron cap marked, 14 15 22 23.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 15	S 14
S 22	S 23

2007

Deposit the marked stone and iron pipe, inverted, alongside the aluminum post.

From the corner of sections 13, 14, 23, and 24.

S. 87°59.2' W., between sections 14 and 23.

- 39.924 Point for the 1/4 section corner of sections 14 and 23, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 14

1/4 —————

S 23

2007

Set a steel fence post alongside the aluminum post.

- 79.848 The corner of sections 14, 15, 22, and 23.

N. 0°13.9' W., between sections 14 and 15.

- 40.481 The 1/4 section corner of sections 14 and 15, monumented with a conglomerate stone, 10 X 6 X 2 inches, firmly set, dimly marked 1/4.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W	
1/4	
S 15	S 14
2007	

Deposit the marked stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

N. 0°48.8' W., beginning new measurement.

39.887 The corner of sections 10, 11, 14, and 15, monumented with an unrecorded iron pipe, 1 1/2 inch diameter, projecting 3 inches above the ground, with 2 inches diameter iron cap marked, 10 11 14 15.

The iron pipe is accepted as the best available evidence of the position of the original corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W	
S 10	S 11
S 15	S 14
2007	

Deposit the iron pipe, inverted, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

From the corner of sections 11, 12, 13, and 14.

S. 88°44.1' W., between sections 11 and 14.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- 38.796 Point for the 1/4 section corner of sections 11 and 14, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
S 11  
1/4 —————  
S 14  
2007

Set a steel fence post alongside the aluminum post.

- 77.592 The corner of sections 10, 11, 14, and 15.
- 

N. 0°40.7' W., between sections 10 and 11.

- 39.953 Point for the 1/4 section corner of sections 10 and 11, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 29 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
1/4  
S 10 | S 11  
2007

Set a steel fence post alongside the aluminum post.

Corner is located on the south side of a NW-SE dirt road.

- 79.906 The corner of sections 2, 3, 10, and 11, monumented with a limestone, 12 X 6 X 5 inches, dimly marked with 5 notches on south edge. Alongside the corner, an unrecorded iron pipe, 1 1/2 inches diameter, with 2 inches diameter iron cap marked, 2 3 10 11.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T 10 N R 12 W

S 3	S 2
S 10	S 11

2007

Deposit the marked stone and iron pipe, inverted, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

From the corner of sections 1, 2, 11, and 12.

S. 89°04.8' W., between sections 2 and 11.

38.907 Point for the 1/4 section corner of sections 2 and 11, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

	T 10 N R 12 W
	S 2
1/4	_____
	S 11
	2007

Set a steel fence post alongside the aluminum post.

77.814 The corner of sections 2, 3, 10, and 11.

---

From the corner of sections 3, 4, 33, and 34, on the south boundary of the township, hereinbefore described.

N. 0°45.7' W., between sections 33 and 34.

40.188 Point for the 1/4 section corner of sections 33 and 34, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:



DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T 10 N R 12 W

1/4

S 33 | S 34

2007

Set a steel fence post alongside the aluminum post.

80.376

The corner of sections 27, 28, 33, and 34, monumented with an unrecorded iron pipe, 2 inches diameter, projecting 3 inches above the ground, with 2 1/2 inches diameter iron cap marked, 27 28 33 34.

The iron pipe is accepted as the best available evidence of the position of the original corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 28	S 27
S 33	S 34

2007

Deposit the iron pipe, inverted, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

From the corner of sections 26, 27, 34, and 35.

S. 89°31.7' W., between sections 27 and 34.

40.827

Point for the 1/4 section corner of sections 27 and 34, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 27

1/4 —————

S 34

2007

Set a steel fence post alongside the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

81.654 The corner of sections 27, 28, 33, and 34.

---

N.  $0^{\circ}38.3'$  W., between sections 27 and 28.

40.028 Point for the  $1/4$  section corner of sections 27 and 28, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2  $1/2$  inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
1/4  
S 28 | S 27  
2007

Set a steel fence post alongside the aluminum post.

80.056 The corner of sections 21, 22, 27, and 28, monumented with an unrecorded iron pipe, 1 inch diameter, with a 1  $1/2$  inches diameter iron cap marked, 21 22 27 28.

The iron pipe is accepted as the best available evidence of the position of the original corner.

At the corner point

Set an aluminum post, 30 inches long, 2  $1/2$  inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
S 21 | S 22  
S 28 | S 27  
2007

Deposit the iron pipe, inverted, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

From the corner of sections 22, 23, 26, and 27.

S.  $89^{\circ}36.3'$  W., between sections 22 and 27.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- 40.857 Point for the 1/4 section corner of sections 22 and 27, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
S 22  
1/4 —————  
S 27  
2007

Set a steel fence post alongside the aluminum post.

- 81.714 The corner of sections 21, 22, 27, and 28.
- 

N. 0°45.6' W., between sections 21 and 22.

- 39.505 Point for the 1/4 section corner of sections 21 and 22, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
1/4  
S 21 | S 22  
2007

Set a steel fence post alongside the aluminum post.

- 79.010 The corner of sections 15, 16, 21, and 22, monumented with a limestone, 18 X 10 X 3 inches, firmly set, marked with 3 notches on south and 3 notches on east edges, with a mound of stone, 3 ft. base, 2 ft. high, south of corner. Alongside the corner, a 2 inch carsonite survey marker, a rebar, 1/2 inch diameter, 20 inches long, projecting 6 inches above the ground with plastic cap marked "BOX ELDER CO SURVEYOR", and an iron pipe, 1 inch diameter, 44 inches long, with a 1 1/2 inches diameter iron cap marked, 15 16 21 22.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T 10 N R 12 W

S 16	S 15
S 21	S 22

2007

Deposit the marked stone, rebar and iron pipe, inverted,  
alongside the aluminum post.

---

From the corner of sections 14, 15, 22, and 23.

S. 88°40.0' W., between sections 15 and 22.

40.058 Point for the 1/4 section corner of sections 15 and 22, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

	T 10 N R 12 W
	S 15
1/4	_____
	S 22
	2007

Set a steel fence post alongside the aluminum post.

80.116 The corner of sections 15, 16, 21, and 22.

---

From the corner of sections 10, 11, 14, and 15.

S. 88°01.1' W., between sections 10 and 15.

41.068 Point for the 1/4 section corner of sections 10 and 15, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

	T 10 N R 12 W
	S 10
1/4	_____
	S 15
	2007

Set a steel fence post alongside the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 82.136 The corner of sections 9, 10, 15, and 16, monumented with an unrecorded iron pipe, 1 inch diameter, projecting 32 inches above the ground, with a 1 1/2 inches diameter iron cap marked, 9 10 15 16, and a limestone, 16 X 10 X 6 inches, dimly marked and deposited alongside.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 9	S 10
S 16	S 15

2007

Deposit the marked stone and iron pipe, inverted, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

N. 0°42.4' W., between sections 9 and 10.

- 40.829 Point for the 1/4 section corner of sections 9 and 10, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

1/4

S 9	S 10
-----	------

2007

Set a steel fence post alongside the aluminum post.

- 81.658 The corner of sections 3, 4, 9, and 10, monumented with a limestone, 12 X 8 X 5 inches, firmly set, marked with 5 notches on south and 3 notches on east edges. Alongside the corner, an unrecorded iron pipe, 3/4 inch diameter, 3 ft. long, projecting 2 ft. above the ground, with a 1 inch diameter iron cap marked, 3 4 9 10.

At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 4	S 3
S 9	S 10

2007

Deposit the marked stone and iron pipe, inverted, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

From the corner of sections 2, 3, 10, and 11.

S. 89°14.4' W., between sections 3 and 10.

41.068 Point for the 1/4 section corner of sections 3 and 10, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
S 3  
1/4 —————  
S 10  
2007

Set a steel fence post alongside the aluminum post.

Corner is located approximately 45 links south of a NE-SW dirt road.

82.136 The corner of sections 3, 4, 9, and 10.

N. 1°27.6' W., between sections 3 and 4.

40.483 The 1/4 section corner of sections 3 and 4, monumented with a limestone, 11 X 9 X 5 inches, firmly set, marked 1/4 on west face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T 10 N R 12 W

1/4

S 4 | S 3

2007

Deposit the marked stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

N. 1°13.4' W., beginning new measurement.

- 39.997 The corner of sections 3, 4, 33, and 34, on the north boundary of the township, monumented with an iron post, 2 1/2 inches diameter, projecting 12 inches above the ground, in a mound of stone, with brass cap marked as described in the official record of the 1967 resurvey.

Set a steel fence post alongside the iron post.

Corner is located on north edge of rim.

---

From the corner of sections 27, 28, 33, and 34.

S. 89°49.1' W., between sections 28 and 33.

- 40.046 Point for the 1/4 section corner of sections 28 and 33, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 28

1/4 —————

S 33

2007

Set a steel fence post alongside the aluminum post.

- 80.092 The corner of sections 28, 29, 32, and 33, monumented with an unrecorded iron pipe, 1 inch diameter, with a 1 1/2 inches diameter iron cap marked, 28 29 32 33.

The iron pipe is accepted as the best available evidence of the position of the original corner.

At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 29	S 28
S 32	S 33

2007

Deposit the iron pipe, inverted, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

N. 0°29.5' W., between sections 28 and 29.

40.429 The 1/4 section corner of sections 28 and 29, monumented with a limestone, 11 X 8 X 4 inches, firmly set, projecting 2 inches above the ground, marked 1/4 on west face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

1/4

S 29	S 28
------	------

2007

Deposit the marked stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

N. 0°28.9' W., beginning new measurement.

40.306 The corner of sections 20, 21, 28, and 29, monumented with a limestone, broken in two, 12 X 8 X 6 inches, when put together, the bottom half is firmly set, marked with 4 notches on east edge. Alongside the corner, a rebar, 5/8 inch diameter, with yellow plastic cap marked "BOX ELDER CO SURVEYOR", and an unrecorded iron pipe, 1 inch diameter, with 1 1/2 inches diameter iron cap marked, 20 21 28 29.

At the corner point



DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 20	S 21
S 29	S 28

2007

Deposit the broken marked stone, rebar, and iron pipe, inverted, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

From the corner of sections 21, 22, 27, and 28.

N. 89°41.7' W., between sections 21 and 28.

**39.935** Point for the 1/4 section corner of sections 21 and 28, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W
S 21
1/4
S 28
2007

Set a steel fence post alongside the aluminum post.

**79.870** The corner of sections 20, 21, 28, and 29.

N. 0°45.9' W., between sections 20 and 21.

**39.765** Point for the 1/4 section corner of sections 20 and 21, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T 10 N R 12 W

1/4

S 20 | S 21

2007

Set a steel fence post alongside the aluminum post.

79.530

The corner of sections 16, 17, 20, and 21, monumented with a limestone, 9 X 4 X 3 inches, firmly set, marked with 3 notches on south and 4 notches on east edges. Alongside the corner, an unrecorded iron pipe, 1 inch diameter, 4.5 ft. long, projecting 24 inches above the ground, with a 1 1/2 inch diameter iron cap marked, 16 17 20 21.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 17	S 16
S 20	S 21

2007

Deposit the marked stone and iron pipe, inverted, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

From the corner of sections 8, 9, 16, and 17, monumented with a sandstone, 10 X 5 X 3 inches, plainly marked with 4 notches on south and 4 notches on east edges. Alongside the corner, an unrecorded iron pipe, 3/4 inch diameter, firmly set, projecting 2 ft. above the ground, with a 1 1/2 inches diameter iron cap marked, 8 9 16 17.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 8	S 9
S 17	S 16

2007

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit the marked stone and iron pipe, inverted, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

N.  $0^{\circ}09.3'$  W., between sections 8 and 9.

39.682 Point for the  $1/4$  section corner of sections 8 and 9, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
1/4  
S 8 | S 9  
2007

Set a steel fence post alongside the aluminum post.

79.364 The corner of sections 4, 5, 8, and 9, monumented with an unrecorded iron pipe, 1 inch diameter, with a 1 1/2 inches diameter iron cap marked, 4 5 8 9.

The iron pipe is accepted as the best available evidence of the position of the original corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
  
S 5 | S 4  
S 8 | S 9  
  
2007

Deposit the iron pipe, inverted, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

From the corner of sections 3, 4, 9, and 10.

S.  $89^{\circ}48.7'$  W., between sections 4 and 9.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- 38.479** Point for the 1/4 section corner of sections 4 and 9, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
S 4  
1/4 —————  
S 9  
2007

Set a steel fence post alongside the aluminum post.

- 76.958** The corner of sections 4, 5, 8, and 9.

N. 3°22.5' W., between sections 4 and 5.

- 41.436** Point for the 1/4 section corner of sections 4 and 5, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
1/4  
S 5 | S 4  
2007

Set a steel fence post alongside the aluminum post.

- 80.593** The corner of sections 4, 5, 32, and 33, on the north boundary of the township, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 10 inches above the ground, with brass cap marked as described in the official record of the 1967 resurvey; and a steel fence post alongside.

From the corner of sections 5, 6, 31, and 32, on the south boundary of the township, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, projecting 4 inches above the ground, with aluminum cap marked as described in the official record of the 2006 resurvey; and a steel fence post alongside.

N. 1°54.2' W., between sections 31 and 32.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

40.154 Point for the 1/4 section corner of sections 31 and 32, at proportionate distance, there is no remaining evidence of the original corner, not monumented.

80.308 Point for the corner of sections 29, 30, 31, and 32, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 30	S 29
S 31	S 32

2007

Set a steel fence post alongside the aluminum post.

---

From the corner of sections 28, 29, 32, and 33.

N. 89°45.9' W., between sections 29 and 32.

41.162 Point for the 1/4 section corner of sections 29 and 32, at proportionate distance, there is no remaining evidence of the original corner, not monumented.

82.324 The corner of sections 29, 30, 31, and 32.

---

S. 89°35.6' W., between sections 30 and 31.

40.928 Point for the 1/4 section corner of sections 30 and 31, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
S 30

1/4 —————  
S 31  
2007

Set a steel fence post alongside the aluminum post.

81.856 The corner of sections 25, 30, 31, and 36, on the west boundary of the township, hereinbefore described.

---

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

From the corner of sections 29, 30, 31, and 32.

N.  $0^{\circ}10.9'$  W., between sections 29 and 30.

- 40.132 Point for the  $1/4$  section corner of sections 29 and 30, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W	
1/4	
S 30	S 29
2007	

Set a steel fence post alongside the aluminum post.

- 80.264 Point for the corner of sections 19, 20, 29, and 30, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W	
S 19	S 20
S 30	S 29
2007	

Set a steel fence post alongside the aluminum post.

---

From the corner of sections 20, 21, 28, and 29.

S.  $89^{\circ}33.4'$  W., between sections 20 and 29.

- 40.286 The  $1/4$  section corner of sections 20 and 29, monumented with a wood post, 18 X 2 X 2 inches, firmly set, projecting 6 inches above the ground, with no visible marks.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T 10 N R 12 W  
S 20  
1/4 —————  
S 29  
2007

Deposit the wood post inside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

N. 89°45.1' W., beginning new measurement.

41.589 The corner of sections 19, 20, 29, and 30.

---

S. 89°01.4' W., between sections 19 and 30.

41.285 Point for the 1/4 section corner of sections 19 and 30, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
S 19  
1/4 —————  
S 30  
2007

Set a steel fence post alongside the aluminum post.

82.673 The corner of sections 19, 24, 25, and 30, on the west boundary of the township, hereinbefore described.

---

From the corner of sections 19, 20, 29, and 30.

N. 3°45.4' W., between sections 19 and 20.

40.218 Point for the 1/4 section corner of sections 19 and 20, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T 10 N R 12 W

1/4

S 19 | S 20

2007

Set a steel fence post alongside the aluminum post.

80.436

The corner of sections 17, 18, 19, and 20, monumented with a basalt stone, 18 X 14 X 6 inches, firmly set, projecting 4 inches above the ground, dimly marked with 3 notches on south and 5 notches on east edges; and a steel fence post alongside.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 18	S 17
S 19	S 20

2007

Deposit the marked stone alongside the aluminum post.

---

From the corner of sections 16, 17, 20, and 21.

N. 89°35.7' W., between sections 17 and 20.

43.034

Point for the 1/4 section corner of sections 17 and 20, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 17

1/4 —————

S 20

2007

Set a steel fence post alongside the aluminum post.

86.068

The corner of sections 17, 18, 19, and 20.

---

S. 89°02.2' W., between sections 18 and 19.



DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- 40.505 The 1/4 section corner of sections 18 and 19, monumented with a basalt stone, 12 X 8 X 8 inches, firmly set, projecting 6 inches above the ground, marked 1/4 on NW face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to bedrock, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
S 18  
1/4 —————  
S 19  
2007

Deposit the marked stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

S. 87°39.3' W., beginning new measurement.

- 37.986 The corner of sections 13, 18, 19, and 24, on the west boundary of the township, hereinbefore described.
- 

From the corner of sections 17, 18, 19, and 20.

N. 1°17.3' E., between sections 17 and 18.

- 40.616 The 1/4 section corner of sections 17 and 18, monumented with a limestone, 10 X 8 X 6 inches, firmly set, projecting 6 inches above the ground, marked 1/4 on west face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
1/4  
S 18 | S 17  
2007

Deposit the marked stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

---

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

N.  $1^{\circ}59.6'$  E., beginning new measurement.

- 40.514 The corner of sections 7, 8, 17, and 18, monumented with a basalt stone, 18 X 10 X 8 inches, firmly set, projecting 4 inches above the ground, marked with 4 notches on south and 5 notches on east edges.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 7	S 8
S 18	S 17

2007

Deposit the marked stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

The centerline of a NE-SW gravel road bears south 25.8 links distance.

From the corner of sections 8, 9, 16, and 17.

N.  $89^{\circ}09.2'$  W., between sections 8 and 17.

- 41.537 Point for the 1/4 section corner of sections 8 and 17, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 8

1/4 —————

S 17

2007

Set a steel fence post alongside the aluminum post.

- 83.074 The corner of sections 7, 8, 17, and 18.

S.  $87^{\circ}16.5'$  W., between sections 7 and 18.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- 40.787** Point for the 1/4 section corner of sections 7 and 18, at proportionate distance, there is no remaining evidence of the original corner.  
Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
S 7  
1/4 —————  
S 18  
2007

Set a steel fence post alongside the aluminum post.

- 81.930** The corner of sections 7, 12, 13, and 18, on the west boundary of the township, hereinbefore described.

From the corner of sections 7, 8, 17, and 18.

**N. 0°23.0' W.**, between sections 7 and 8.

- 39.946** The 1/4 section corner of sections 7 and 8, monumented with a basalt stone, 8 X 7 X 4 inches, firmly set, projecting 4 inches above the ground, marked 1/4 on west face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
1/4  
S 7 | S 8  
2007

Deposit the marked stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

**N. 0°30.0' E.**, beginning new measurement.

- 40.122** The corner of sections 5, 6, 7, and 8, monumented with a basalt stone, 14 X 12 X 6 inches, firmly set, projecting 5 inches above the ground, dimly marked with 5 notches on south and 5 notches on east edges.

At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W

S 6	S 5
S 7	S 8

2007

Deposit the marked stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

From the corner of sections 4, 5, 8, and 9.

N. 88°39.8' W., between sections 5 and 8.

41.386 Point for the 1/4 section corner of sections 5 and 8, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T 10 N R 12 W  
S 5  
1/4 —————  
S 8  
2007

Set a steel fence post alongside the aluminum post.

Corner is located in thick greasewood.

82.772 The corner of sections 5, 6, 7, and 8.

S. 87°10.2' W., between sections 6 and 7.

41.226 Point for the 1/4 section corner of sections 6 and 7, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 10 NORTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T 10 N R 12 W  
S 6  
1/4 —————  
S 7  
2007

Set a steel fence post alongside the aluminum post.

- 82.452 The corner of sections 1, 6, 7, and 12, on the west boundary of the township, hereinbefore described.
- 

From the corner of sections 5, 6, 7, and 8.

N. 1°27.3' W., between sections 5 and 6.

- 40.323 Point for the 1/4 section corner of sections 5 and 6, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 10 inches in the ground to bedrock, with magnet at base, in a mound of stone, 5 ft. base, to top of aluminum cap marked:

T 10 N R 12 W  
1/4  
S 6 | S 5  
2007

Set a steel fence post alongside the aluminum post.

- 78.277 The corner of sections 5, 6, 31, and 32, on the north boundary of the township, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 8 inches above a mound of stone, 3 ft. base, 6 inches high, with brass cap marked as described in the official record of the 1967 resurvey; and a steel fence post alongside.
-

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD ASSISTANTS**

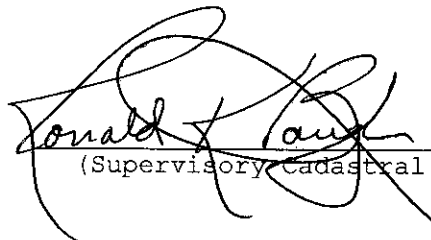
Name	Capacity
Glenn B. Hatch	Cadastral Surveyor
Travis R. Hanks	Cadastral Surveyor

## CERTIFICATE OF SURVEY

I, **Ronald K. Baugh**, **Supervisory Cadastral Surveyor**, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the **13<sup>th</sup> day of December, 2006**, I have **dependently resurveyed a portion of the south boundary, a portion of the west boundary, and a portion of the subdivisional lines in Township 10 North, Range 12 West**, of the **Salt Lake Meridian**, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions of the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 16, 2009

Date

  
(Supervisory Cadastral Surveyor)


## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt Lake City, Utah

The foregoing field notes of the **dependent resurvey of a portion of the south boundary, a portion of the west boundary, and a portion of the subdivisional lines in Township 10 North, Range 12 West, Salt Lake Meridian, Utah**, executed by **Ronald K. Baugh, Supervisory Cadastral Surveyor**, having been critically examined and found correct, are hereby approved.

July 9, 2009

Date



(Chief Cadastral Surveyor for Utah)

[illegible]